


American Chlorinating Machine Model 1063

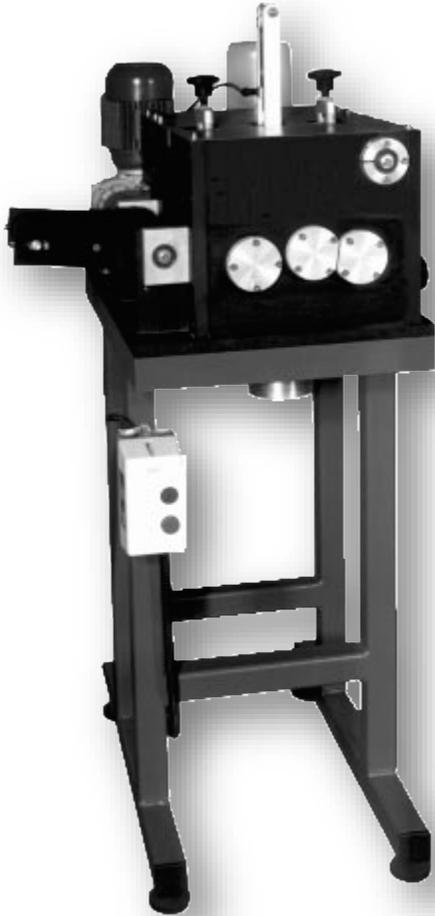

Processes soles with heels up to 1 ¾"

Applies solution and scrubs treated surface with brush

Fumes contained and easily extracted

Easy access allows cleaning of reservoirs

Optional 1063/S with side conveyor for feed-through sole processing systems

Technical Data:

Power: 220V
Phases: 3
Cycles: 60
Amps: 3

A simple feed-through chlorinating system for chlorinating flat or heeled soles is available with the **American Chlorinating Machine**.

Soles are loaded in one side and carried over a sponge roller that applies solution, a scrub brush removes contamination and another sponge roller then applies more solution before the sole exits the machine.

This feed-through conveyORIZED process allows this machine to be used in various American Outsole Processing Systems.



100 Cummings Center, Suite 140A Beverly, MA 01915 U.S.A.
tel: 978-524-0168, fax: 978-524-4805
Email: info@asmc-us.com Website: www.asmc-us.com

